

JYL-PFM6006U8

Printable RFID Metal Tag




Functional Specifications:

RFID Protocol:	EPC Class1 Gen2, ISO18000-6C
Frequency:	(US) 902-928MHZ, (EU)865-868MHZ
IC type:	Ucode-8
Memory:	EPC 128bits , User 0bits, TID 96bits
Write Cycles:	100,000 Times
Functionality:	Read/write
Data Retention:	50 Years
Applicable Surface:	Metal Surfaces
Read Range : (Fix Reader)	2.0 meters on metal surface 1.5 meters on liquid surface
Warranty:	1 Year

Physical Specification:

Size:	60.0x6.0mm
Thickness:	1.0mm
Material:	Foam
Colour:	White (Customizable color printing)
Mounting Methods:	Adhesive
Weight:	1.3g
Recommended Printer:	Zebra R110Xi4 / Postek TX3R / SATO CL4NX


Dimensions:



The information contained on this Document is considered to be confidential material proprietary to JYL-Tech, and this information shall not be disclosed, duplicated or copied for any purpose, Nor made available for any third party without the prior consent to JYL-Tech.

Performance Test Chart

PFM6006:

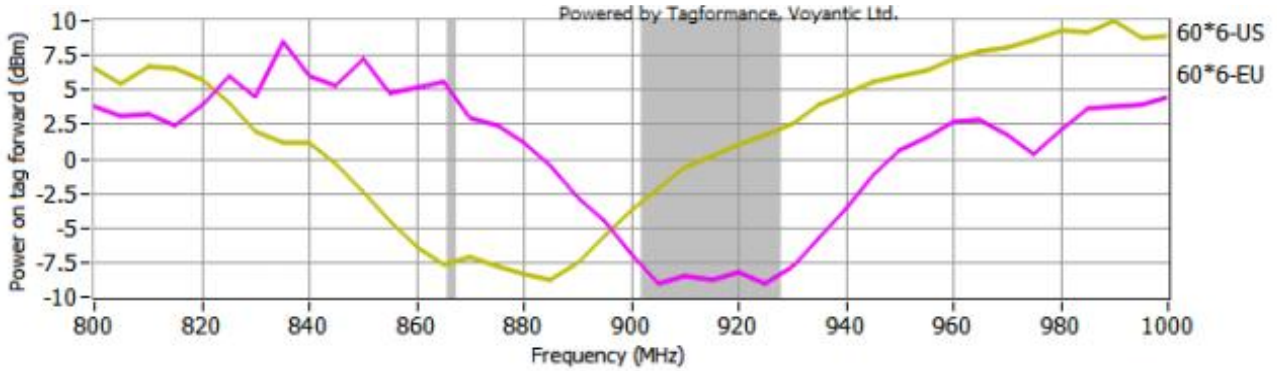

Environment Specification:

IP Rating:	IP57
Temperature:	-20 ~ 85°C
Certifications:	Reach Approved, RoHS Approved, CE Approved

The information contained on this Document is considered to be confidential material proprietary to JYL-Tech, and this information shall not be disclosed, duplicated or copied for any purpose, Nor made available for any third party without the prior consent to JYL-Tech.