


PVC Disc Tag

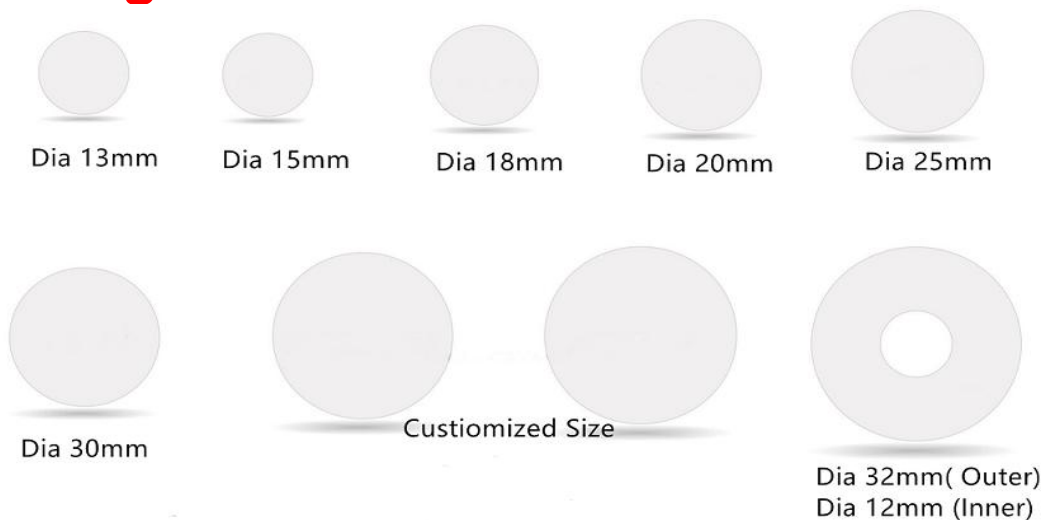

Key Features

- Strong lamination housing
- Easily integrated to your workpiece/ product for a variety of industrial and Item Identification logistical
- Different dimensions allow for optimum ratio of size / reading performance
- Optional with Ferrite Layer to mount on metal
- RoHS green product
- Security Process Control
- Asset tracking
- Device embedded
- Identification
- Inventory management

Application

Tag Spec.:

Material:	PVC, PET	Color:	White, Transparent
Size:	- 15/18/20/25/30/32/35/40/50mm LF - 13/15/18/20/25/30/32/35/40/50mm HF - 20/25/30/32/35/40/50mm UHF	Resistance:	Indoor environment wafer Dust proof
Thickness:	1.0~1.2mm or customized size	IP Class:	IP65
Operating Temperature:	-25 to 60°C	Storage Temperature:	-40 to 70°C


Optional Craft:

Coding:	Chip Encoding
Custom logo:	Silk-screen printing, Laser engrave
ID Number Printing:	DOD printing, Laser engrave
On Metal:	Anti-Metal Ferrite Layer optional, Thickness from 0.3-0.5mm
Adhesive:	Ordinary Adhesive sticker, 3M Adhesive Layer Optional
Packing:	Flod up Heat-Shrinkable Packing
Warranty:	1 year

Self-adhesive Tag



Transparent PVC Tag



Tag with Epoxy



On Metal Tag



The information contained on this Document is considered to be confidential material proprietary to JYL-Tech, and this information shall not be disclosed, duplicated or copied for any purpose, Nor made available for any third party without the prior consent to JYL-Tech.