

JYL-UHFP2208

The **RFID UHF PCB Tag** is designed with FR-4 substrate, which solves the problem that the tag cannot work normally on the metal surface. RFID PCB board labeling systems are now widely used for the management and identification of goods and assets. Mainly used in warehousing and logistics management, IT asset management, inventory management, asset management, auto parts tracking, industrial manufacturing, etc.



Blue

Green

White

Functional Specifications:

Black

Red

RFID Protocol:	EPC Class1 Gen2, ISO18000-6C
Frequency:	(US) 902-928MHz, (EU) 865-868MHz
IC type:	Alien Higgs-3
Memory:	EPC 96bits (Up to 480bits), USER 512bits, TID64bits
Write Cycles:	100,000times
Functionality:	Read/write
Data Retention:	Up to 50 Years
Applicable Surface:	Metal Surfaces
Read Range : (Fix Reader)	450cm - (US) 902-928MHz, on metal
	470cm - (EU) 865-868MHz, on metal
Read Range : (Handheld Reader)	260cm - (US) 902-928MHz, on metal
	300cm - (EU) 865-868MHz, on metal
Warranty:	1 Year


Physical Specification:

Size:	22x8mm, (Hole: D2mm*2)
Thickness:	3.0mm without IC bump, 3.8mm with IC bump
Material:	FR4 (PCB)
Colour:	Black (Red, Blue, Green, White)
Mounting Methods:	Adhesive, Screw
Weight:	1.5g
Dimensions:	$8.0 \text{mm} \xrightarrow{22.0 \text{mm}} 3.8 \text{mm} \xrightarrow{1} \xrightarrow{22.0 \text{mm}} 3.0 \text{mm}$


The information contained on this Document is considered to be confidential material proprietary to JYL-Tech, and this information shall not be disclosed, duplicated or copied for any purpose, Nor made available for any third party without the prior consent to JYL-Tech.



JYL-UHFP2208U1

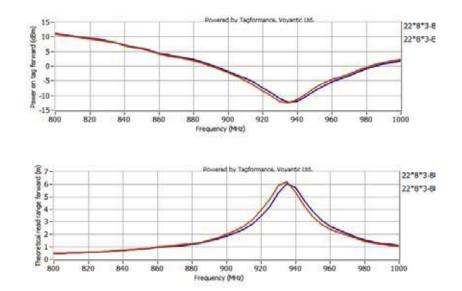

JYL-UHFP2208E1

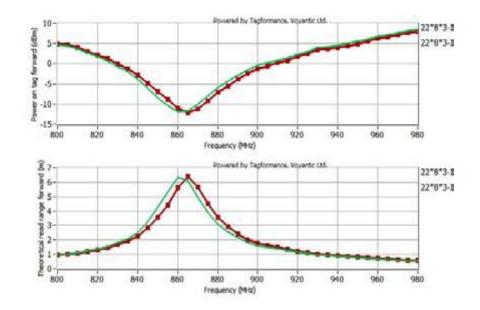

Environmental Specification:

IP Rating:	IP68
Storage Temperature:	-40°C to +150°C
Operation Temperature:	-40°C to +100°C

Order information:	
JYL-UHFP2208U1:	(US) 902-928MHz,
JYL-UHFP2208E1:	(EU) 865-868MHz

The information contained on this Document is considered to be confidential material proprietary to JYL-Tech, and this information shall not be disclosed, duplicated or copied for any purpose, Nor made available for any third party without the prior consent to JYL-Tech.

Shanghai Jiayulian Technology Co.,Ltd | T:+86 18 0166 4655 / +86 178 8798 3711 | info@jyl-world.com | www.jyl-world.com