

RFID Laundry Tag Solution



JYL-Tech offers a selection of laundry RFID tags using the 125 kHz LF, 13.56 MHz HF, as well Gen 2 UHF frequencies. Whether you need tags that are ultra-rugged, small, or flexible, our RFID laundry tags are designed to withstand the hot and institutional laundry processes.

The laundry RFID tags are designed to endure the hotel and institutional laundry processes providing durability and suitability for washing, drying, dry cleaning and ironing. They can be used for many different applications such as laundry application, logistics, anti-counterfeiting, access control, industrial transponder, supply chain management control, inventory control, asset tracking, process control, electronic ticketing and manufacturing system.










Over Moulded Laundry Tag



Key Features:


- Waterproof
- Designed for harsh environment.
- Twice injection moulding technics.
- Simultaneous Identification of Tags
- Exceptional temperature performance, oil, chemic solutions.
- Different dimensions option allow for optimum ratio of size.

Tag Spec.:

Material:	PPS	IP Rating:	IP68
Dimension:	<ul style="list-style-type: none"> - Dia15mm  - Dia16mm  - Dia18mm  - Dia20mm  - Dia22mm with two holes  - Dia26mm with two holes  - Thickness: Appr 2.5mm 	Tested Read Range:	<ul style="list-style-type: none"> 3~10cm  1~50cm  50~150cm  Distance varying upon the tested Reader
Embed way:	Twice injection moulding technics	Operating Temperature:	-20 °C to 140 °C
Color:	Black, Blue, Gray	Washing times:	Appr 100 Times
Weight:	1.8kgs	Storage Temperature:	-20 °C to 110 °C for 500 hours 120 °C for 100 hours 140 °C for 5 hours

Optional :

Coding:	Chip Encoding
Customized Logo Printing:	- Laser engrave number or logo - Silk screen printing
Data Retention	10 years
Warranty:	1 year
MOQ:	1000PCS

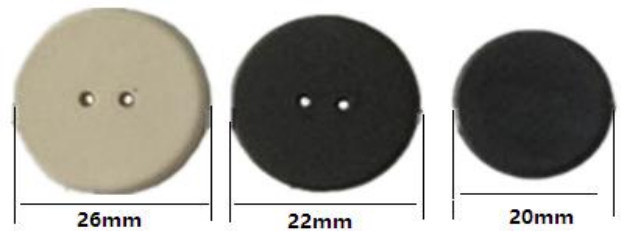

The information contained on this Document is considered to be confidential material proprietary to JYL-Tech, and this information shall not be disclosed, duplicated or copied for any purpose, Nor made available for any third party without the prior consent to JYL-Tech.