


RFID Keyfob KA12

RFID keyfob is the extension products of normal ISO card, which is designed for easy carry by person. JYL-Tech RFID keyfobs combine the RFID technology with good looking and practical keyfob housings. They can easily be fitted to a normal metal key ring.

CHIP Available Frequency: **LF HF UHF**

Product Specification:

Material	ABS or PC
Dimension	56*32*T8.5mm
IP Class	IP68
Operating Temp.	- 25°C to 80°C
Storage Temp.	- 25°C to 85°C
Net Weight	Approx 5g/pc
Packing	100pcs/Bag,1000pcs/Carton
Colors	Gray, black, Blue, Red, White, Green, Yellow, etc.
MOQ	500PCS

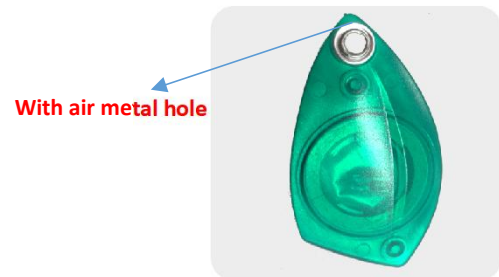

PC



ABS

Personalisation Options:

- ☆ Pad Printing
- ☆ Photo Printing
- ☆ Full-color Printing
- ☆ Laser Engraved Number
- ☆ Chip Encoding
- ☆ Rings or Thread is optional
- ☆ Air Metal Hole

Applications:

- ☆ Access Control
- ☆ Time Attendance
- ☆ Loyalty System
- ☆ Payment NFC System
- ☆ Health Clubs
- ☆ Leisure Areas

Chip Available:

	18000-part2	EM4200, TK4100, etc.
125KHz	ISO11784/785	T5577, EM4305, Hitag1, Hitag2, Hitag S256, etc.
	ISO15693	ICODE SLI, Tag-it 2048, etc.
13.56Mhz	ISO18082	NTAG210, NTAG212, NTAG213, NTAG215, NTAG216, Topaz512, etc.
	ISO14443A	MIFARE Classic®, MIFARE Ultralight®, MIFARE®DESFire®EV1, MIFARE Plus®, Fudan FM11RF08, etc.
860Mhz-960Mhz	ISO/IEC 18000-6C EPC Class1 Gen2	UCODE, MONZA, HIGGS, etc.

Other IC types availabel on request !

The information contained on this Document is considered to be confidential material proprietary to JYL-Tech, and this information shall not be disclosed, duplicated or copied for any purpose, Nor made available for any third party without the prior consent to JYL-Tech.