


JYL-FLG7015



JYL-FL UHF Textile laundry tag is a rugged tag designed for textile products that undergo a variety of industrial laundering processes, including sterilization and ironing. It is manufactured with UHF technology (860-960 MHz) and conforms to international standards EPC Class1 Gen2 and ISO 18000. This UHF fabric laundry tag is capable of mass reading from a distance of several meters. It identifies, tracks, and manages linen and textile assets effectively. For establishments that require a constant flow of cleaning linens, uniforms, workwear, medical apparel, or cleaning supplies, laundry tags assist automated systems in tracking large numbers of individual items faster and more accurately.

The JYL-FLG7015 model is gamma compatible.

■ Architecture

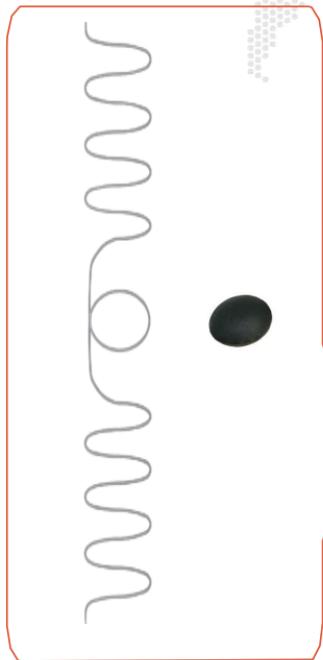

Textile laundry tag consists of 3 main parts which can withstand harsh industrial environment for laundry processes operating for hundreds cycles.

Part1: LaundryChips

A silicon chip protection by rigid resin housing withstand harsh industrial laundry environment repeat for hundreds of circulations washing

Part2: Laundry Antenna

Antenna made of flexible, anti-oxidative stainless steel fibers, coated with Teflon, resistant to high temperature chemical detergent liquids during all laundry processes

Part3: FABRIC SUBSTATE


Based on the RFID module and antenna, the components are held in place and withstand millions of shocks. The fabric material requires a series of pretreatments to keep shrinkage and deformation within minimum range, and is coated with a silicone heat adhesive as a laminating overlays to protect the laundrychip inside

■ Highlights

- More than 250 washing cycles (under industrial washing environment pressure 60 bars, heating at 200°C);
- Small dimensions & Maximum flexibility, with ultra-high-density bulk reading;
- Available in 3 versions: source tagging(sewn), patchable (heat-sealable) and in pouch;
- On Demand Service: Laser logo with EPC encoding in RFID chip;

■ Installation


Stitching



Heat sealed



Pouching



■ Specifications

Tag Type	JYL-FLG7015
Tag Dimensions	70(L) x 15(W) x 1.5(H)mm
Tag Weight(Approx.)	0.6g
Tag Warranty	200 wash cycles or 3 years from shipping date (whichever comes first)
Tag Memory	Gamma compatible chip, EPC 128 bit, User 1312bit
Data Retention	20 years
Read Distance	Up to 4 ~7 meters (ERP=2W fixed reader)
Operating Power	Passive, operates through antenna's RF field
Operating Frequency	865~928MHz
Typical Washing Cycle	Washing: 90°C(194°F), 15 minutes, 200 cycle Pre-drying in Tumbler: 180°C(320°F), 30minutes Ironer: 180°C(356°F), 10 seconds, 200 cycles Sterilization Process: 135°C(275°F), 20 minutes Mechanical Resistance: Up to 60 bars
Autoclave	Air removal: +100°C(+212°F), 5mins, 0.1bar Sterilizing:+134°C(+273°F), 10mins, 3.25bar Drying:+45°C(+113°F), 15min, 0.2bar
Patching Instruction	+204°C(399°F), 12secs, 0.5kg/cm2
Storage Temperature	-40°C to +120°C(-40°F to +248°F)
Chemical Resistance	Normal common chemicals in the washing processes
Compliance	ISO/IEC 18000-6C EPC Class 1 Gen 2
Certification	Gamma Compatible

■ Order Code

JYL= Laundry Tag Brand FL=Fabric Laundry

3515/3611/5512/5815/7010/7015/7018/7510/7512/7515 = Laundry Tag Size Options

T = Tagging (to be sewn into textile)

H = Heat-Sealable (to be heat-sealed on textile)

P = Pouching (pouch with generic RFID logo embroidered)

E = Re-programmable(to be encoded on chips)

L = Laser (Numbering, Brancode, EPC laser-marked)

For example: JYL-FL7015-T = JYL Fabric Laundry sewing type Tag with 70*15mm size

RFID Laundry Tags

